


V2 DATA SHEET

SPECIFICATIONS & PERFORMANCE

2" V Series



Clamped Metallic
with Metallic Center Sections

PERFORMANCE

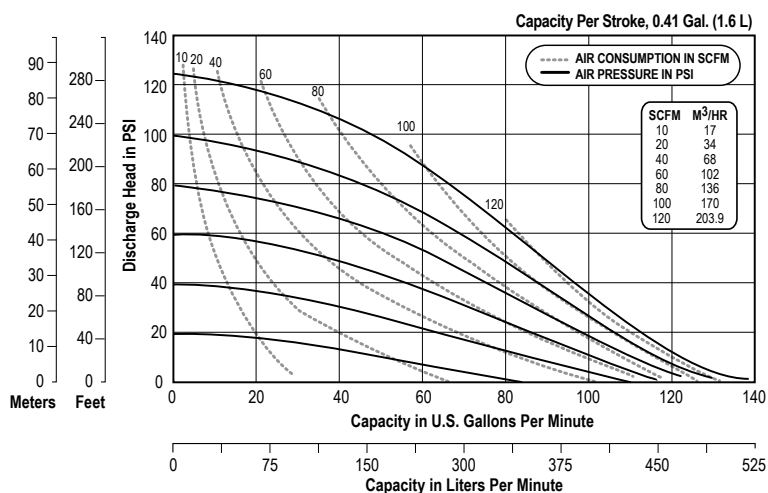

NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

DIMENSIONS

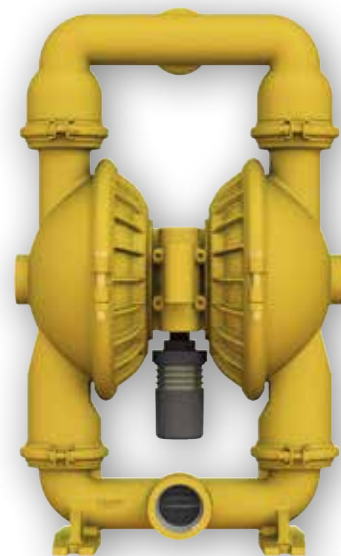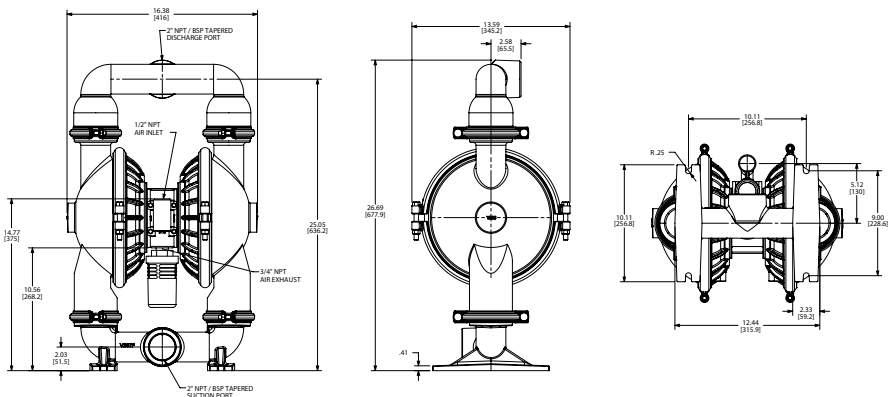

SPECIFICATIONS

Flow Rate

Adjustable to . . . 0-138 gpm (552 lpm)

Port Size

Suction 2" NPT

Discharge 2" NPT

Air Inlet 1/2" NPT

Air Exhaust 3/4" NPT

Suction Lift

Dry 10' (3.05 m)

Wet 20' (6.09 m)

Max Solid Size (Diameter)

. 1/4" (6.35 mm)

Max Noise Level 100 dB(A)

Shipping Weights

Aluminum 65 lbs (29.5 kg)

Cast Iron 113 lbs (51.3 kg)

Stainless Steel 106 lbs (48.1 kg)



VERSAMATIC®

Warren Rupp, Inc. | A Unit of IDEX Corporation
800 North Main Street | Mansfield, OH 44902 USA
Phone: 419.526.7296 | Fax: 419.526.7289

VERSAMATIC.COM

V2_DS-rev0519

©Copyright 2019 Warren Rupp, Inc. All Rights Reserved.