


E2 DATA SHEET

SPECIFICATIONS & PERFORMANCE

E2HP 2" High Pressure Pumps


with Metallic Center Section

PERFORMANCE

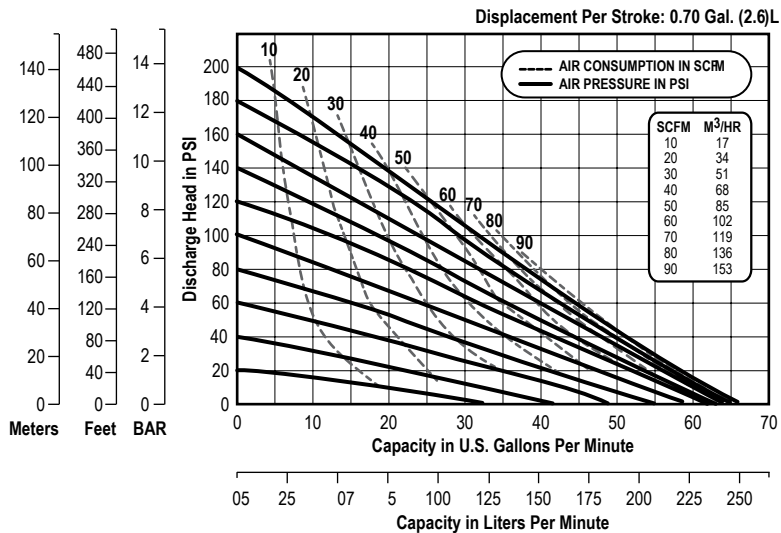

NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

DIMENSIONS

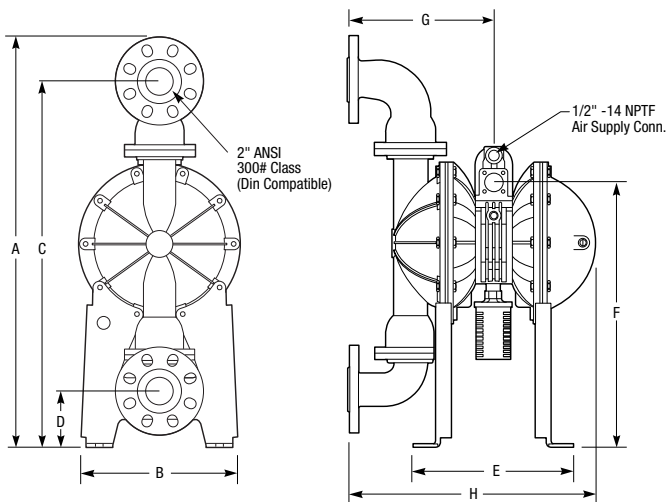

SPECIFICATIONS

Flow Rate

Adjustable to . . .0-69 gpm (261 lpm)

Port Size

Suction2.0" ANSI

Discharge2.0" ANSI

Air Inlet0.5" NPT

Air Exhaust1.0" NPT

Suction Lift

Dry20' (6.09 m)

Wet25' (7.62 m)

Max Solid Size (Diameter)

.0.25"(6.35mm)

Shipping Weights

Stainless Steel91 lbs (41 kg)



VERSAMATIC®

Warren Rupp, Inc. | A Unit of IDEX Corporation
800 North Main Street | Mansfield, OH 44902 USA
Phone: 419.526.7296 | Fax: 419.526.7289

VERSAMATIC.COM

e2hp-rev0519

©Copyright 2019 Warren Rupp, Inc. All Rights Reserved.