


E4 DATA SHEET



SPECIFICATIONS & PERFORMANCE

PERFORMANCE

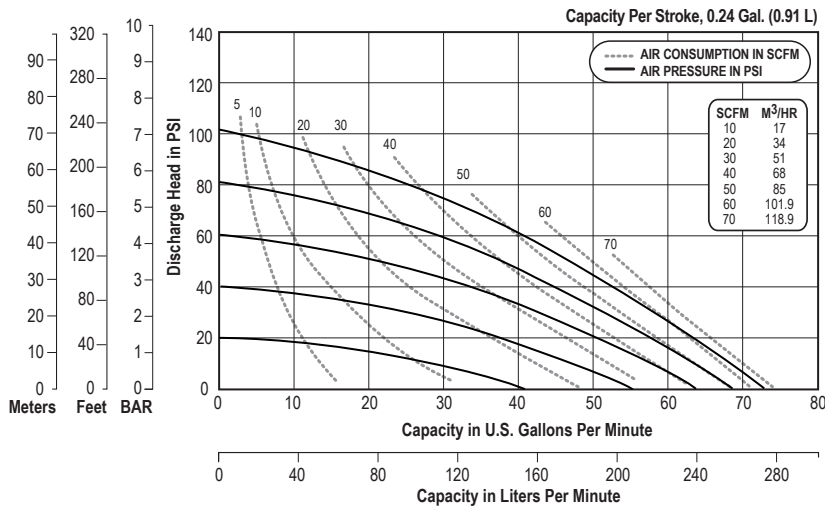

NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

DIMENSIONS

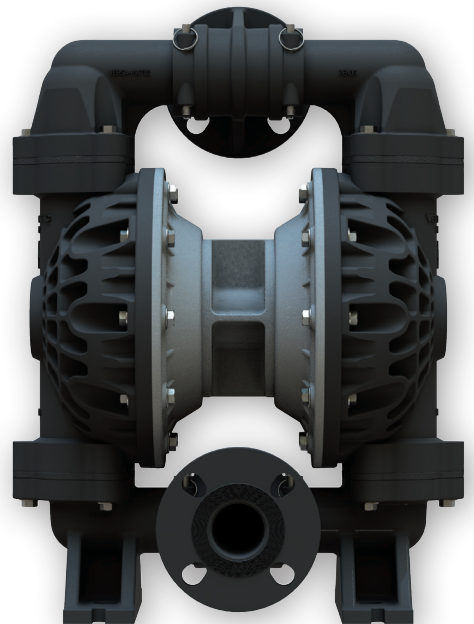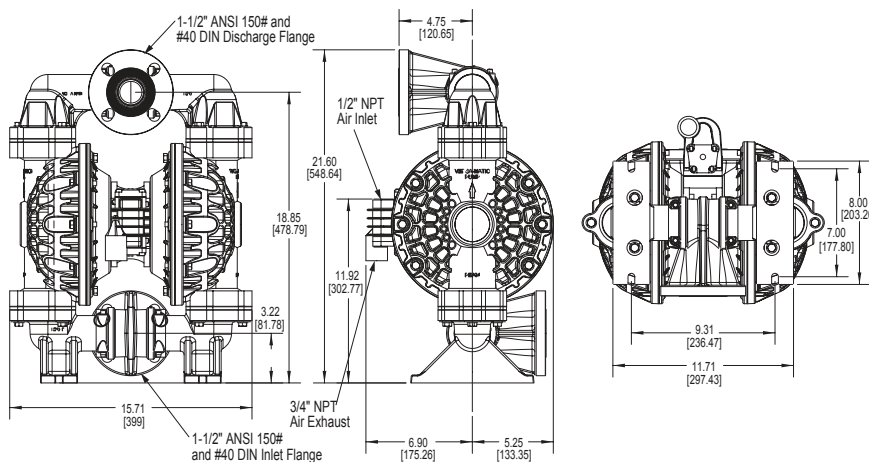

1 1/2" Bolted Plastic with Metal Center Section

SPECIFICATIONS

Flow Rate

Adjustable to . . . 0-75 gpm (284 lpm)

Port Size

Suction 1 1/2" ANSI

Discharge 1 1/2" ANSI

Air Inlet 1/2" NPT

Air Exhaust 3/4" NPT

Suction Lift

Dry 19' (5.8 m)

Wet 31' (9.4 m)

Max Solid Size (Diameter)

. 3/16" (4.76 mm)

Max Noise Level 89 dB(A)

Shipping Weights

Conductive Polypropylene 55 lbs (25 kg)



VERSAMATIC®

Warren Rupp, Inc. | A Unit of IDEX Corporation
800 North Main Street | Mansfield, OH 44902 USA
Phone: 419.526.7296 | Fax: 419.526.7289

VERSAMATIC.COM

e4nmdlAdsATEX-rev0519

©Copyright 2019 Warren Rupp, Inc. All Rights Reserved.