


VALOR DATA SHEET

SPECIFICATIONS & PERFORMANCE


2" Plastic Valor Models: VMV20B

PERFORMANCE

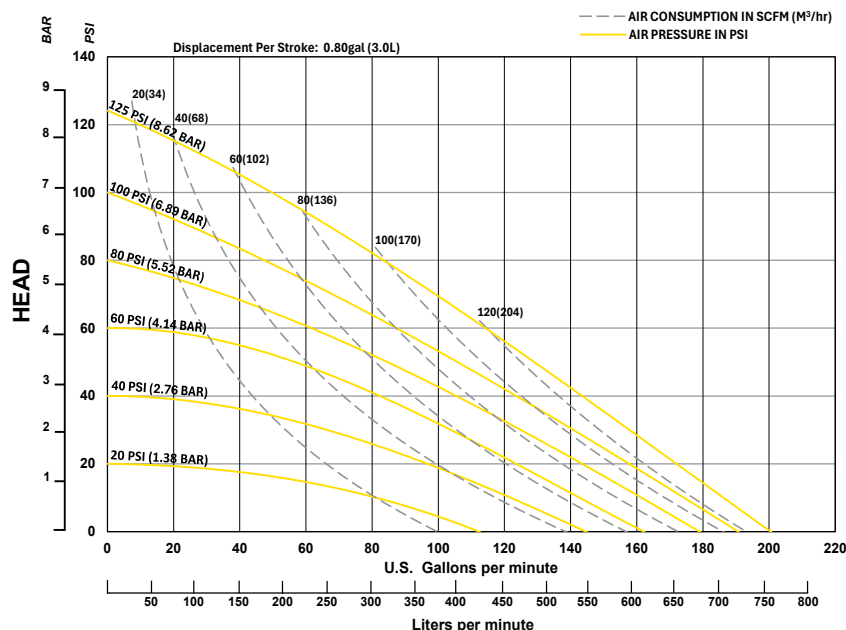

NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

DIMENSIONS

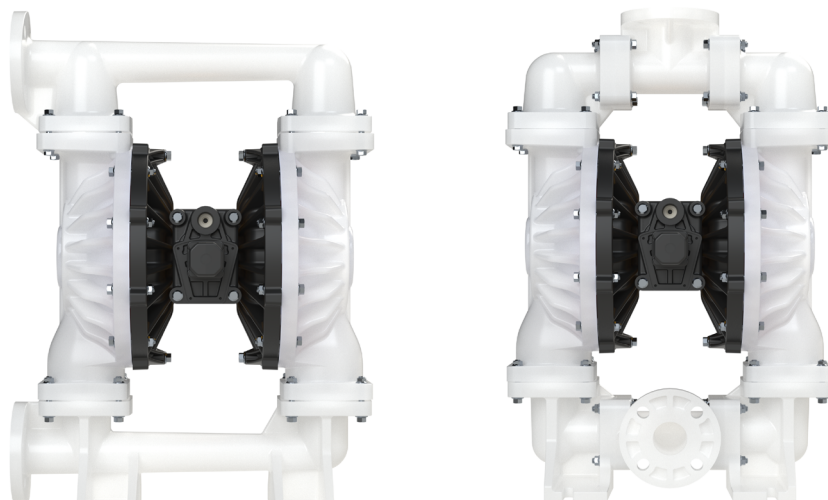

SPECIFICATIONS

Flow Rate

Adjustable to 0-200 gpm (757 lpm)

Port Size - Suction / Discharge

. 2" ANSI/DIN Flange

Max Solid Size (Diameter)

. 0.66" (16 mm)

Air Inlet 3/4" NPT

Air Exhaust 1" NPT

Suction Lift 21'(6.4 m) Dry

Pump Weights

. Polypropylene 68 lbs. (31 kg)

. . with In-line Manifold Option 60 lbs. (27 kg)

. PVDF 101 lbs. (46 kg)

. . with In-line Manifold Option 89 lbs. (40 kg)

. . Conductive Polypropylene 71 lbs. (32 kg)



VERSAMATIC®

Warren Rupp, Inc. | A Unit of IDEX Corporation
800 North Main Street | Mansfield, OH 44902 USA
Phone: 419.526.7296 | Fax: 419.526.7289

VERSAMATIC.COM

Valor_Datasheet-rev0523

©Copyright 2023 Warren Rupp, Inc. All Rights Reserved.

VALOR DATA SHEET


SPECIFICATIONS & PERFORMANCE

2" Plastic Valor

DIMENSIONS


Valor End Ported Option- Polypropylene and PVDF Wet Side

Dimensions in inches (metric dimensions in brackets). Dimensional Tolerance .125" (3mm).

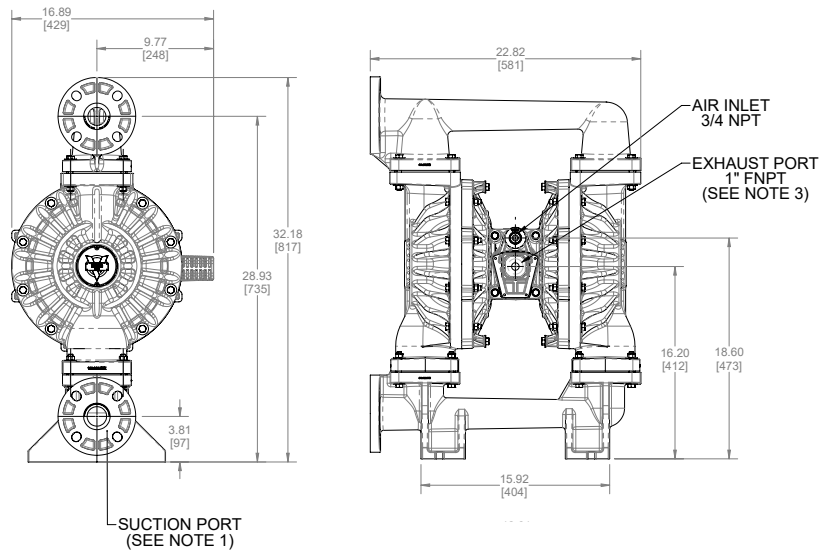


NOTES

1. SUCTION AND DISCHARGE PORT FLANGES ARE DESIGNED TO FIT BOTH ANSI 125# CONNECTION AND PN10 50mm DIN CONNECTION
3. 1" FNPT EXHAUST PORT FOR THREADED MUFFLER OR PIPING EXHAUST AIR IN SUBMERGED APPLICATIONS

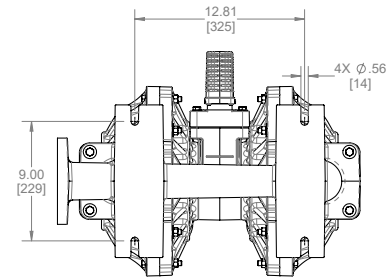


Valor Plastic Bolted Center Ported Options-Polypropylene, PVDF, and Conductive Polypropylene Wet Side

Dimensions in inches (metric dimensions in brackets). Dimensional Tolerance .125" (3mm).

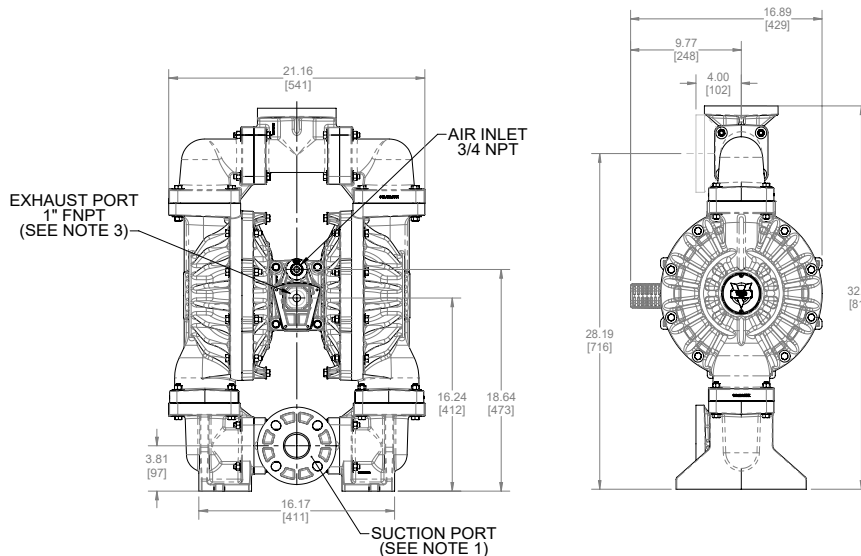

NOTES

1. SUCTION AND DISCHARGE PORT FLANGES ARE DESIGNED TO FIT BOTH ANSI 125# CONNECTION AND PN10 50mm DIN CONNECTION
2. DISCHARGE PORT CAN BE ROTATED 90° HORIZONTAL
3. 1" FNPT EXHAUST PORT FOR THREADED MUFFLER OR PIPING EXHAUST AIR IN SUBMERGED APPLICATIONS

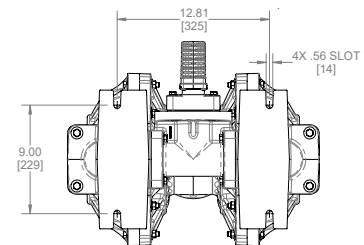

VERSAMATIC®

Warren Rupp, Inc. | A Unit of IDEX Corporation
800 North Main Street | Mansfield, OH 44902 USA
Phone: 419.526.7296 | Fax: 419.526.7289

VERSAMATIC.COM

Valor_VMV20_Datasheet-rev1026

©Copyright 2023 Warren Rupp, Inc. All Rights Reserved.