


VALOR DATA SHEET

SPECIFICATIONS & PERFORMANCE

1 1/2" Plastic Valor


Models: VMV15B

PERFORMANCE

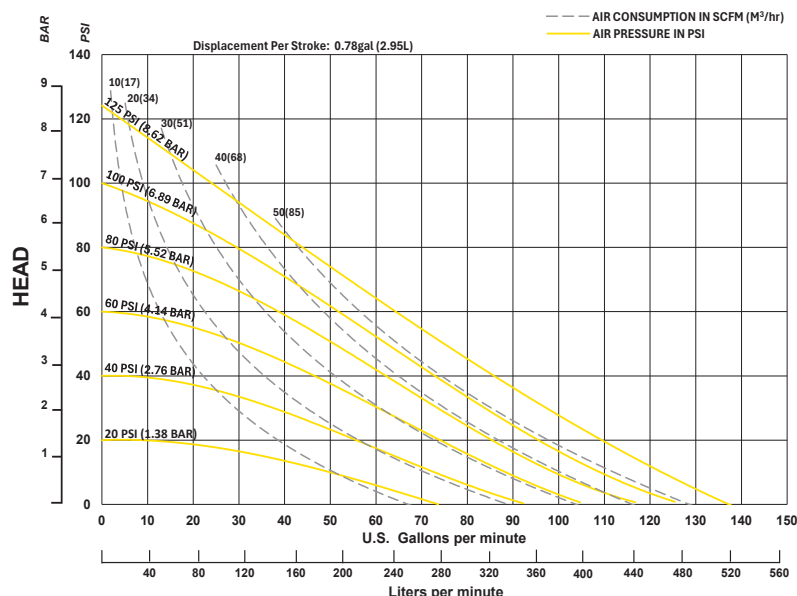

NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

DIMENSIONS

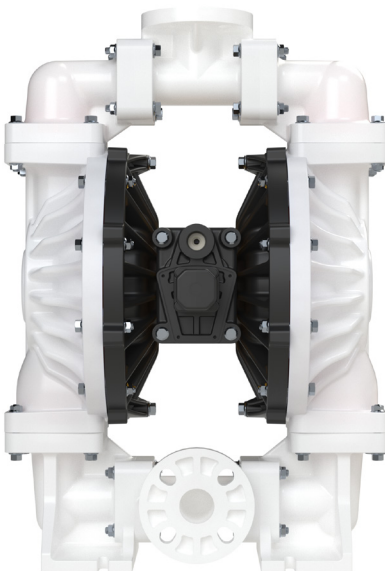

SPECIFICATIONS

Flow Rate

Adjustable to 0-135 GPM (0-511 LPM)

Port Size - Suction / Discharge

..... 1 1/2" ANSI/DIN Flange

Max Solid Size (Diameter)

..... 0.5" (12 mm)

Air Inlet 3/4" NPT

Air Exhaust 1" NPT

Suction Lift 21.9'(6.7 m) Dry

Pump Weights

..... Polypropylene 61 lbs. (28 kg)

..... PVDF 89 lbs. (40 kg)

..... Conductive Poly 60lbs (27 kg)



VERSAMATIC®

Warren Rupp, Inc. | A Unit of IDEX Corporation
800 North Main Street | Mansfield, OH 44902 USA
Phone: 419.526.7296 | Fax: 419.526.7289

VERSAMATIC.COM

Valor_Datasheet-rev0523

©Copyright 2023 Warren Rupp, Inc. All Rights Reserved.

VALOR DATA SHEET


SPECIFICATIONS & PERFORMANCE

1 1/2" Plastic Valor

DIMENSIONS

Valor Plastic Bolted Center Ported Options-Polypropylene, PVDF, and Conductive Polypropylene Wet Side

Dimensions in inches (metric dimensions in brackets). Dimensional Tolerance .125" (3mm).

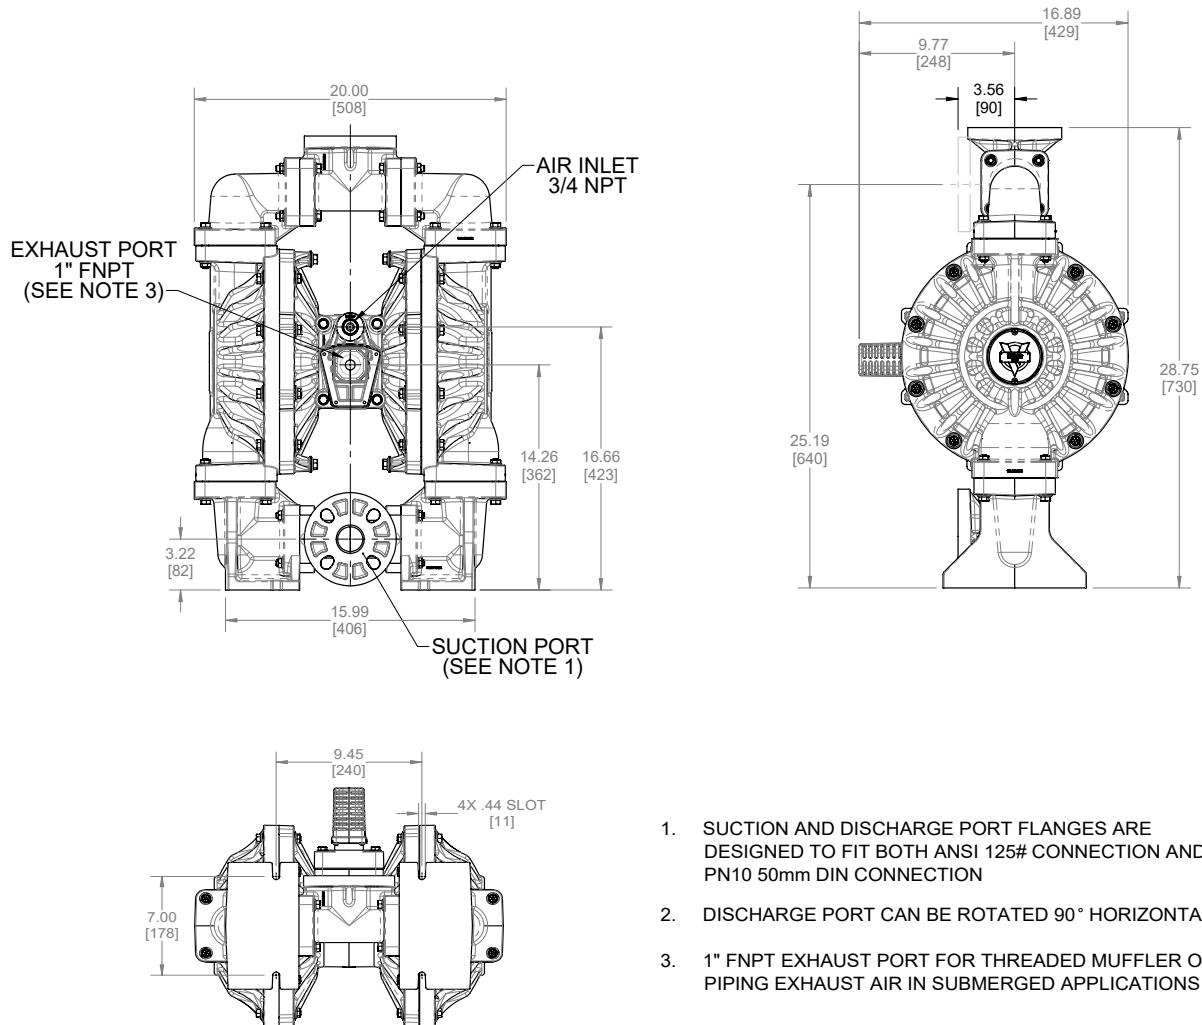

1. SUCTION AND DISCHARGE PORT FLANGES ARE DESIGNED TO FIT BOTH ANSI 125# CONNECTION AND PN10 50mm DIN CONNECTION
2. DISCHARGE PORT CAN BE ROTATED 90° HORIZONTAL
3. 1" FNPT EXHAUST PORT FOR THREADED MUFFLER OR PIPING EXHAUST AIR IN SUBMERGED APPLICATIONS



VERSAMATIC®

Warren Rupp, Inc. | A Unit of IDEX Corporation
800 North Main Street | Mansfield, OH 44902 USA
Phone: 419.526.7296 | Fax: 419.526.7289

VERSAMATIC.COM

Valor_Datasheet-rev0523

©Copyright 2023 Warren Rupp, Inc. All Rights Reserved.