E1 DATA SHEET

SPECIFICATIONS & PERFORMANCE

1" Bolted Metal – ATEX

with Metal Center Section

PERFORMANCE

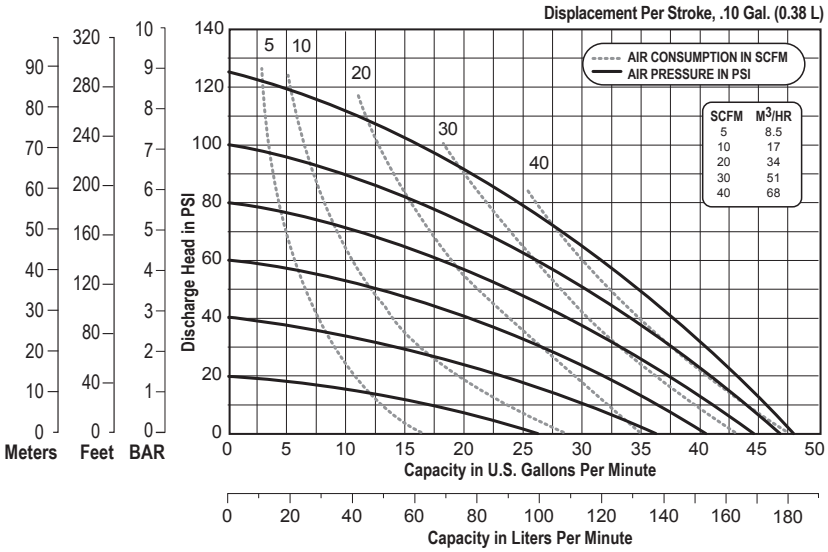

NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

SPECIFICATIONS

Flow Rate
Adjustable to . 0-49 gpm (181.7 lpm)
Port Size
Suction . . . . . .1" NPT
Discharge . . . . . .1" NPT
Air Inlet . . . . . 3/8" NPT
Air Exhaust . . . . . 1/2" NPT
Suction Lift
Dry . . . . . .15' (4.6 m)
Wet . . . . . .31' (9.4 m)
Max Solid Size (Diameter)
. . . . . .1/8" (3.2 mm)
Max Noise Level . . . . . 91 dB(A)
Max Operating Pressure
. . . . . 125 psi (8.6 bar)
Shipping Weights
Aluminum . . . . . 27 lbs (12.2 kg)
Stainless Steel . . . . 40 lbs (18.1kg)
Alloy-C . . . . . 40 lbs (18.1kg)

DIMENSIONS

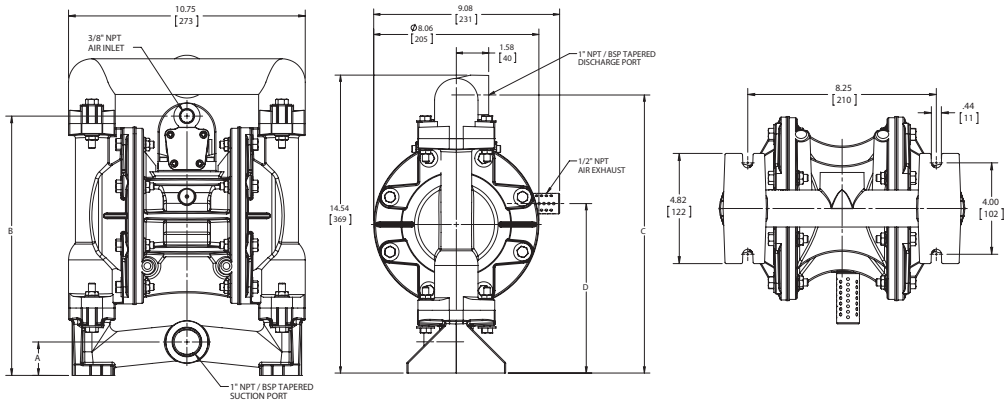

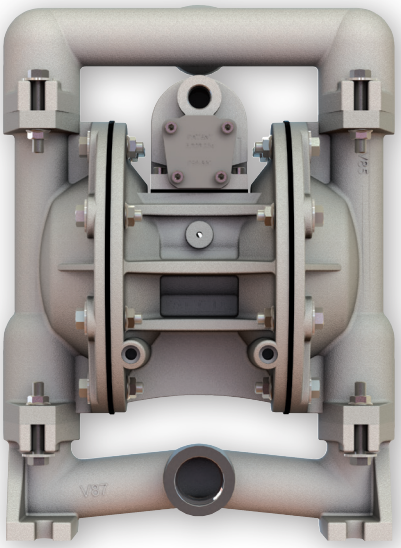

VERSAMATIC®

Warren Rupp, Inc. | A Unit of IDEX Corporation
800 North Main Street | Mansfield, OH 44902 USA
Phone: 419.526.7296 | Fax: 419.526.7289

VERSAMATIC.COM

©Copyright 2019 Warren Rupp, Inc. All Rights Reserved.