


# E2 HP DATA SHEET

## SPECIFICATIONS & PERFORMANCE

## E2-HP 2" High Pressure Pumps

### PERFORMANCE

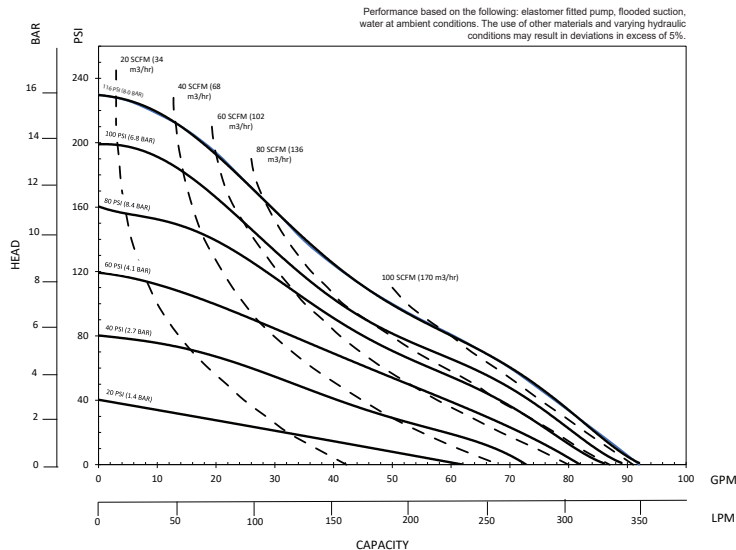

NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

### SPECIFICATIONS

#### Flow Rate

Adjustable to . . . . . 0-92 gpm (348 lpm)

#### Port Size

Suction . . . . . 2.0" NPTF

Discharge . . . . . 2.0" NPTF

Air Inlet . . . . . 3/4" NPT

Air Exhaust . . . . . 3/4" BSP

#### Max Solid Size (Diameter)

. . . . . 0.25" (6mm)

Heads up to . . . . . 232 PSI (535 ft)

. . . . . 16.0 BAR (163 meters)


#### Maximum Operating Pressure

. . . . . 116 PSI (8.0 BAR)

#### Shipping Weights

Aluminum . . . . . 113.5 lbs (51.5kg)

Stainless Steel . . . . 165.3 lbs (75 kg)

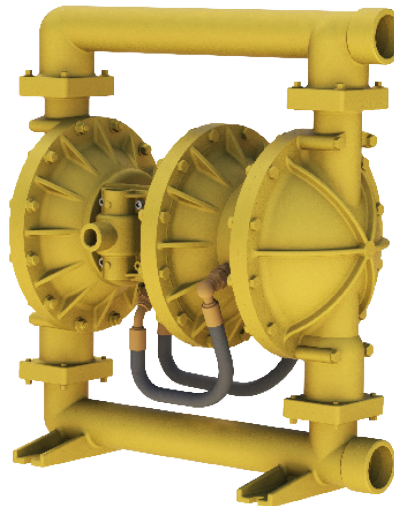

**VERSAMATIC®**

Warren Rupp, Inc. | A Unit of IDEX Corporation  
800 North Main Street | Mansfield, OH 44902 USA  
Phone: 419.526.7296 | Fax: 419.526.7289

[VERSAMATIC.COM](http://VERSAMATIC.COM)

n50-rev0725

©Copyright 2019 Warren Rupp, Inc. All Rights Reserved.

# E2 HP DATA SHEET


## SPECIFICATIONS & PERFORMANCE

## E2 2" High Pressure Pumps

### DIMENSIONS


#### E2 High Pressure - Aluminum Model

Dimensions are  $\pm .13"$  (3mm). Figures in parenthesis = millimeters

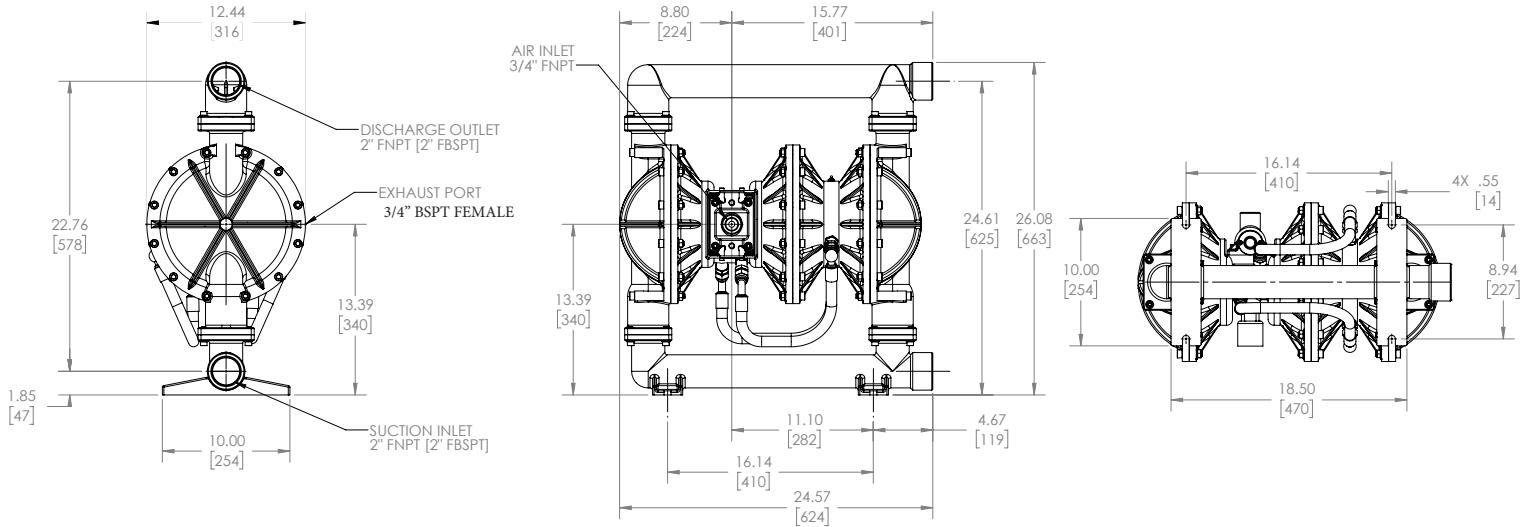

#### E2 High Pressure - Stainless Model

Dimensions are  $\pm .13"$  (3mm). Figures in parenthesis = millimeters

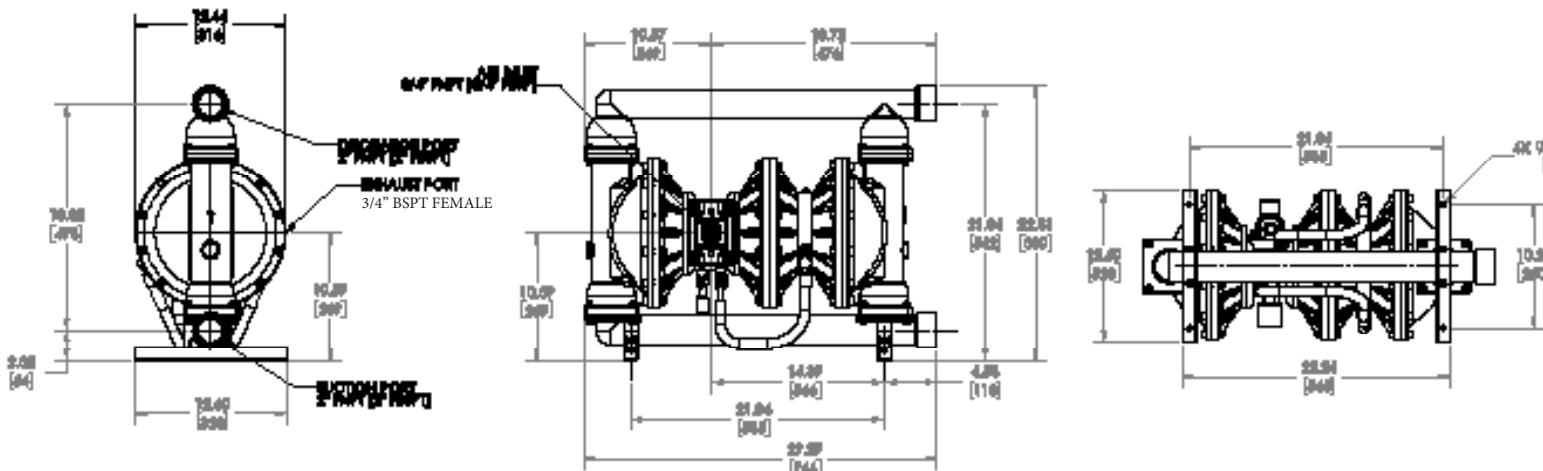

**VERSAMATIC®**

Warren Rupp, Inc. | A Unit of IDEX Corporation  
800 North Main Street | Mansfield, OH 44902 USA  
Phone: 419.526.7296 | Fax: 419.526.7289

[VERSAMATIC.COM](http://VERSAMATIC.COM)

n50-rev0725

©Copyright 2019 Warren Rupp, Inc. All Rights Reserved.